



Cross Flow Motors

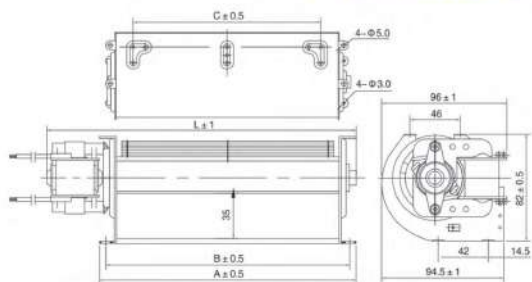

TYPE مدل	VOLTAGE ولتاژ V	FREQUENCY فرکانس Hz	CURRENT شدت جریان A	INPUT توان W	SPEED سرعت r/min	AIR VOLUME دبی هوا m³/h	A mm	B mm	C mm	L mm	NO ON THE CURVE شماره نمودارها
YGF60-480	220	50	0.42	48	2000	354	505	486	450	578	1
YGF60-420	220	50	0.40	45	2000	310	445	438	350	516	2
YGF60-360	220	50	0.38	43	2100	270	385	375	330	458	3
YGF60-300	220	50	0.27	29	2100	230	325	315	270	382	4
YGF60-240	220	50	0.25	27	2100	175	265	255	210	322	5
YGF60-183	220	50	0.2	20	2000	140	206	198	153	253	6




Cross Flow Motor

کدینگ محصولات
Illustration of fan motor model



نمودار اتصال سیم ها
Wiring diagram

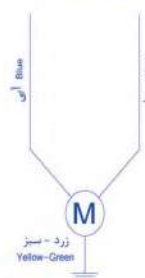

۰۲۶ - ۳۶۶ ۴۹ ۵۶۴
۰۲۶ - ۳۶۶ ۵۳ ۳۹۶

@avalsanat
۰۹۱۲ ۵۶ ۵۶ ۸۹۰

www.avvalsanat.com
avalsanat@gmail.com